LA CAMPAGNE

La signature Qualité !



LA CAMPAGNE

Fabriqué dans les Hauts de France

www.bennelacampagne.com



[1]

[2]

[3]

Over 60 years of experience



A young management team with an agricultural background dedicated to providing services to farmers.

As the son and grandson of farmers, I am well aware of the pressures you are under and your requirements. For over 60 years, our company has been committed to innovation. This means we are able to provide you with reliable machines tailored to your needs. We firmly believe in the future of agriculture. This drives us to constantly modernise our production sites so that we can guarantee high-quality, reliable and high-performance products.

The robust nature and longevity of our machines are at the heart of our approach because we know they have to withstand the challenges of everyday use. Our considered investments enable us to offer the best working environment to our 85 employees while ensuring an efficient manufacturing process. In 2019, we expanded our services with the acquisition of the company Panien, a specialist in spreaders and public works.

We are determined to provide you with competitive solutions designed to fully meet your expectations. Our commitment to innovation and quality is essential for building strong partnerships.

Together, let's look forward to a sustainable and flourishing future for the agricultural sector, where you have the equipment you need to succeed.

Gautier Lecureux
CEO



[4]



[5]



[6]



- 1970s : the first dumper left our workshops. [1]
- 1980s: a new design and logo, [2]
- 1990s: consolidation of designs and expansion, [3]
- 2000-2010: digital technology, CAD, process optimisation, [4]
- 2016: new generation, work on weight and stability. [5]
- Improved finish achieved by additional assembly post painting. [6]

A COP certified production tool (Conformity of production CE)

We have been based in Campagne-lès-Hesdin since 1964. In 2022, we invested in a new 4,000 m² building designed to improve both the quality of our employees' work and the quality of our products' finish. This modern space has been designed to complement the 6,000 m² of existing buildings and improve ergonomics, safety and the well-being of our team members by providing a bright and optimal working environment. Thanks to state-of-the-art equipment and advanced technology, we have been able to strengthen our capacity to produce top-quality vehicles. The design of our new facility also enables an improved material flow and a more rigorous monitoring of manufacturing processes. Every detail has been carefully considered to guarantee an impeccable finish while increasing productivity.

We are convinced that this investment in a first-rate working environment will result in products which perform even better and an improved customer experience.





Welding robot



Container turner for continuous welding



Container assembly



Shot blasting and painting booth

Chassis

MAIN **STRENGTHS ...**

- Highly robust chassis with continuously welded crosspieces
- Careful assembly using rigid tubes
- Optimisation of the power of the jack and better tipping performance due to its position
- Excellent stability thanks to a wider tipping pivot
- The comfort of the crossbar spring has been certified for over 50 years
- Increased safety when using your steering axle


[1] [2] [4] [6] [7]



[3]



[5]

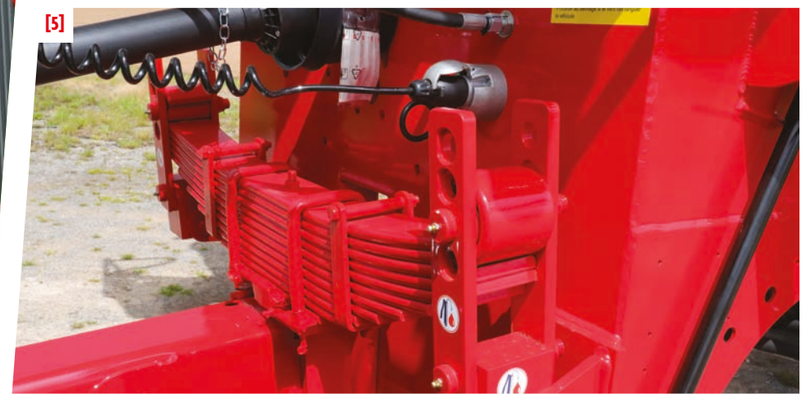

ADVANTAGES

- Hydraulic hose with metric fitting **[1]**
- Heavy-gauge tube (with continuously welded crosspieces) **[2]**
- Tipping beam **[3]**
- Assembly of jack and compressor post painting **[4]**
- Crossbar transverse spring **[5]**
- Trailer lock indicator **[6]**
- Tailgate safety device on hydraulic hose. **[7]**


For more information...

Certification

Tridem with connecting rods
Long-term reliability

Balance
Lower centre of gravity with flat bar mount


Connecting rods
Connecting rods on all axles.

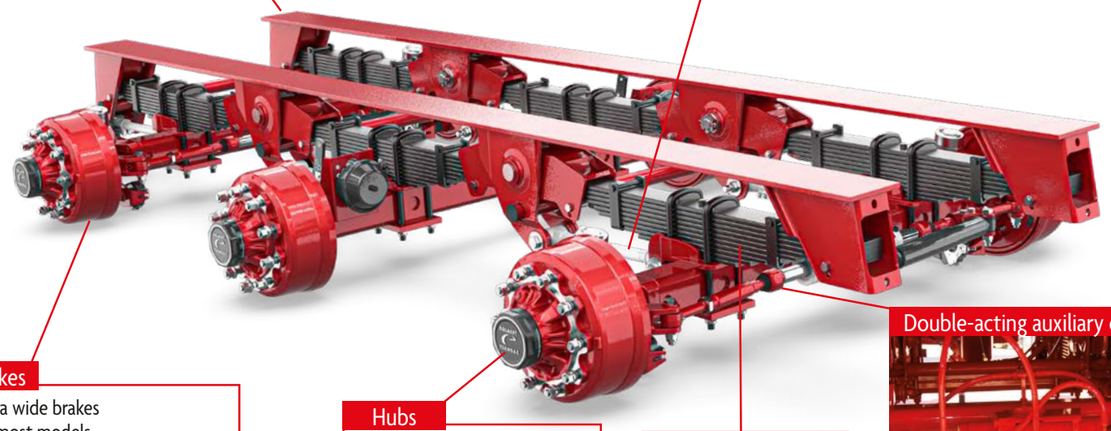

Brakes
Extra wide brakes on most models.


Hubs
Oversized spindles and bearings

Master leaf springs
Several master leaf springs

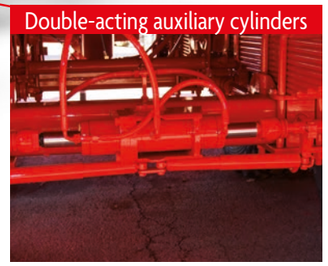


Double-acting auxiliary cylinders

For large wheelers:
Air suspension

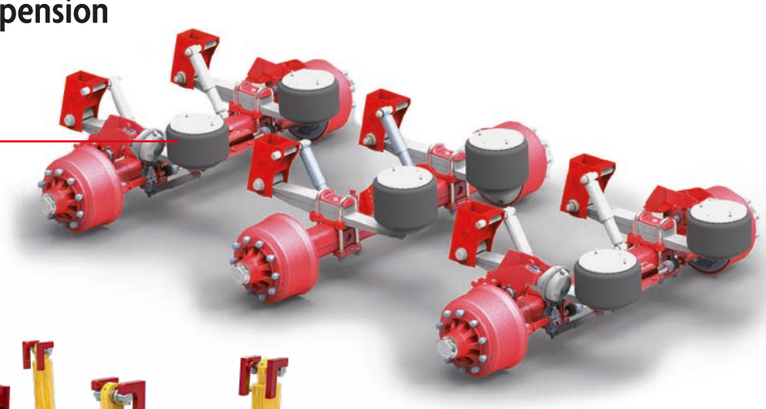

La Campagne also provides:
Hydraulic suspension

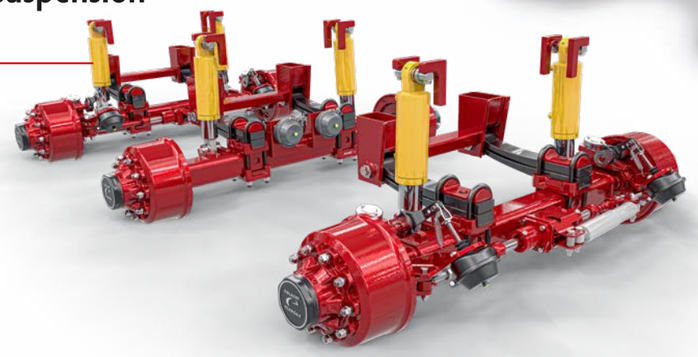


‘Traditional’ powered steering axle







‘Hydro-powered’ steering axle [patented system*]

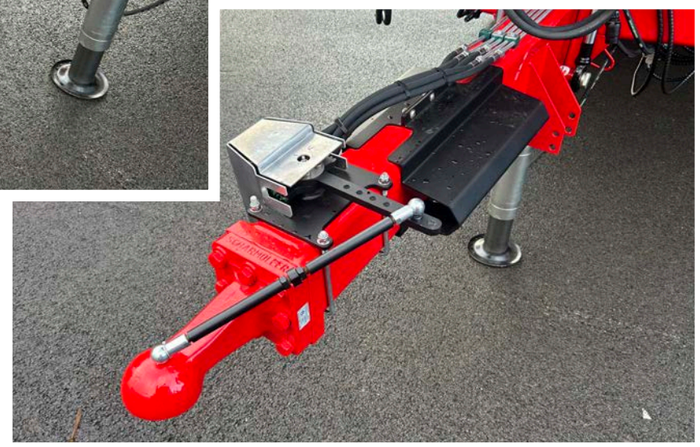

*European patent No. EP4101738
*French patent No. FR3123593

Containers

MAIN **STRENGTHS ...**


- Increased solidity thanks to the double sides and folded structure
- Easy to clean thanks to its curved sides
- Long service life thanks to the continuous welds
- Wide tailgate aperture with dual-action jack
- Quick assembly of identical side extensions with no material getting caught during emptying.

[1] [2] [4]




Numerous reinforcements

[3]

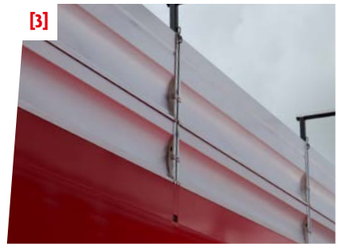

[6] [7]

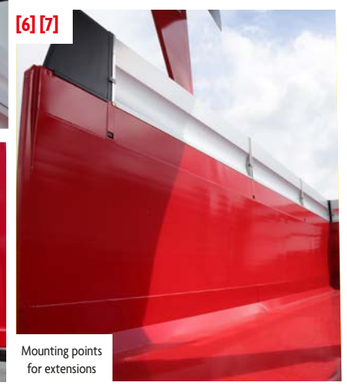

[5]



Stainless steel hatch

Mounting points for extensions

ADVANTAGES

- Double sides, **[1]**
- Multiple reinforcements due to folded structure, **[2]**
- Quick assembly of extensions **[3]**
- Continuous welds, **[4]**
- Hydraulic tailgate with stainless steel hatch and variable extensions measuring 0.40, 0.60, 0.80 and 1 m in aluminium **[5]**
- Mounting points for extensions with smooth container interior, **[6]**
- One-piece floor panel and side panels made from high-strength steel **[7]**

For more information...

Top choices at La Campagne



[1]



[2]

BRC81-32 with lateral tarpaulin

[3]



BRC85-32

[4]



BRC85-32

[5]



Semi-elevator

- Hydraulic extensions [1]
- Lateral tarpaulin with covering hood [2]
- Hydraulic extensions + aluminium extensions [3]
- VBK tarpaulin [4]
- Semi-elevator with lateral tarpaulin and rear ladder [5]
- Hydraulic crossbar suspension [6]
- Available in heights 1.30 m, 1.50 m and 1.80 m [7]

For more information..

[6]



[7]



71-29 - 1.80m

Your job...





... our job!





[4]

Finishes made to last!

Quality as standard

- Shot blasting in the booth **[1]**
- Two coats of EPOXY primer applied using an electrostatic process, **[2]**
- Two coats of polyurethane varnish applied using an electrostatic process, **[3]**
- Sterilizing at 85°C
- Precise dosage with automated installation.
- Customisable colours and branding **[4]**

Certified quality


DUPONT®

All production sites are equipped with the same facilities.

[1]



[2]

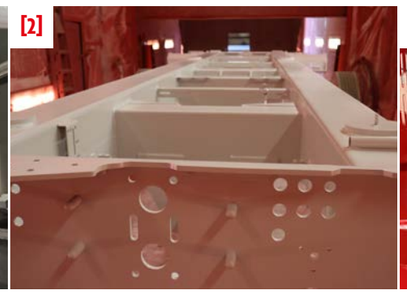

[3]



Standard equipment package

For more information...

- Ladder on front side
- Large cut-out at the front
- Stainless steel protective grille
- Rear lights, marker lights and LED rotating beacon
- Mounting points for PVC boot support
- Electro-galvanised hose bracket
- Stainless steel hatch
- Mounting points for lateral tarpaulin
- Grommet on bolted plate
- Mudguards on top + front/rear mounting points
- Mounting points for front ramp
- Mounting points for extensions
- Hydraulic BAE









Technical specifications
for dumpers



Name	61 - 24	66 - 24	71 - 24	66-29*	71 - 29*
Internal length (m)	6.1	6.6	7.1	6.6	7.1
Internal width (m)	2.25	2.25	2.25	2.25	2.25
Axle type	Tandem with connecting rods Flat plates	Tandem with connecting rods Flat plates	Tandem with connecting rods Flat plates	Tandem with connecting rods Flat plates	Tandem with connecting rods Flat plates
Axle and number of shafts	130 - 10	130 - 10	130 - 10	150 - 10	150 - 10
Usable volume in 1.30 m without extension (m^3)	17.84	19.31	20.77	19.31	20.77
Useful volume in 1.50 m without extension (m^3)	20.59	22.28	23.96	22.28	23.96
Useful volume in 1.80 m without extension (m^3)	-	26.73	28.75	26.73	28.75
Volume of oil	46	46	46	46	46
Compressor 1000 rpm	Optional	Optional	Optional	Optional	Optional
Hydraulic tailgate	Standard	Standard	Standard	Standard	Standard
Steering axle with safety feature	Optional	Optional	Optional	Standard	Standard

76 - 29*	81 - 29*	76 - 32**	81 - 32**	85 - 32**	91 - 32**
7.6	8.1	7.6	8.1	8.5	9.1
2.25	2.25	2.25	2.25	2.25	2.25
Tandem with connecting rods Flat plates	Tandem with connecting rods Flat plates	Tridem with connecting rods Flat plates	Tridem with connecting rods Flat plates	Tridem with connecting rods Flat plates	Tridem with connecting rods Flat plates
150 - 10	150 - 10	130 - 10	130 - 10	130 - 10	130 - 10
22.23	23.69	22.23	23.69	24.86	26.62
25.65	27.34	25.65	27.34	28.69	30.72
30.78	32.80	30.78	32.80	34.42	-
65	65	46	65	65	73
130l/min	130l/min	Optional	130l/min	130l/min	130l/min
Standard	Standard	Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard	Standard	Standard

* 30 tonnes GVW option
** 34 tonnes GVW option/European certification

For more information...

65 M³ aluminium sliding floor plate




BAF 65m³

ADVANTAGES

For more information...

- Reversible loading and unloading system
- On-board air suspension weighing facility
- Rapid unloading speed: approx. 3.5 min
- Weight, volume, stability and safety = OPTIMAL
- Proven for over 40 years on heavy goods vehicles
- Wireless remote control for unloading

Characteristics	Length	Width	Height	Volume	Axles*	Brakes
BFA32L	10.5 m	2.45 m	2.45 m	65 m³	☐150 pneumatic	410 x 180

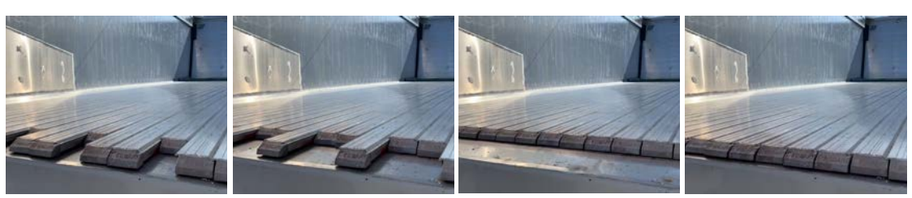

Stage 1 Stage 2 Stage 3 Stage 4


PRODUCTS

- Cereals, manure, compost, wood chips, slurry, silage, etc.

[1]



[2]

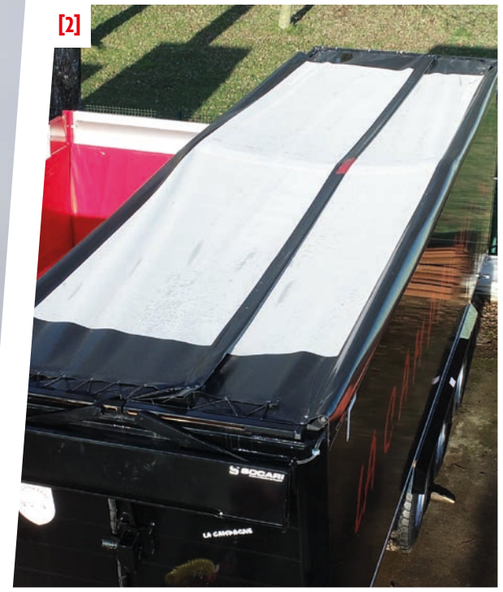

- Wide hydraulic door aperture (H 60) [1]
- Mesh tarpaulin [2]
- ALU apron with tarpaulin to 'support the product' [3]
- Air suspension [4]
- Sloping front façade for optimised unloading speed [5]

[3]



[4]



[5]



28,000 L
transfer tank

ADVANTAGES

- Rear emptying hatch
- Tubular level
- Hydraulic crossbar suspension
- Pumping arm configuration [1] [2] [4]
- Emergency stop [3]
- 6,000L/min lobe pump+ stone trap [5]
- Rear cone [6]

For more information...

[1]



[2]



[3]



[4]



MAIN **STRENGTHS ...**

- Vent
- Tank subframe for increased durability
- Quick drop using container attachment
- Three possible arm configurations
- Suction and discharge with tractor double-acting system

[5]



OPTIONS ...

- Low-voltage power supply with electrical unit in cabin
- Half-wing mudguards
- Tank cradle
- Hose and cone bracket

[6]



Container carrier

Cost-effective and completely safe



RPC24



RPC24 18t arm


Model	RPC 24T	RPC 29T	RPC 32T
Arm length (m)	5.50	5.70	6.70
Arm	18/20 T	22 T	30 T
Axles	Low tandem □ 150 axles brakes 406x140	Low tandem □ 150 axles brakes 420x200	Low tandem □ 150 axles brakes 406x140
Trailer	optional	standard	standard
Container	4.50 to 6.50	4.70 to 6.70	5.70 to 7.70

ADVANTAGES


- Container on request.
- La Campagne finish
- 'Low' assembly, optimisation of the height of the rollers
- Installation of options such as tarpaulins, height extensions, hydraulic doors, etc.



Dumping roller

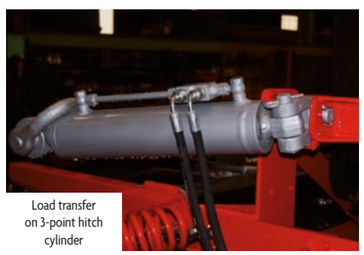

Load transfer on 3-point hitch cylinder

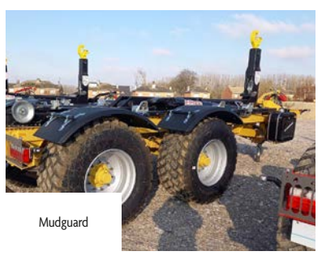

Mudguard



RPC32



Independent hydraulic hose with protective cover

For more information...

Construction dumpers

ADVANTAGES

For more information...


- Jack in front of the bogie axle
- Robust container made of Hardox: base 8 mm - side, front and door 6 mm
- Reinforced 150 mm square axles
- Guide crosspiece for leaf springs
- Tank and shovel holder
- Mounting points for extensions
- Tipping by quick coupler hose
- Optimised ground clearance height 1.50 m with 24 x 20.5

Accredited

HARDOX® IN MY BODY



Tipping

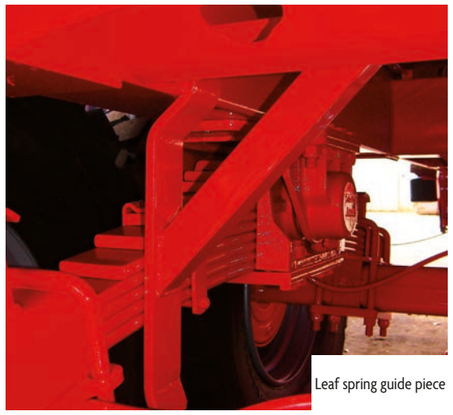

Leaf spring guide piece

MAIN **STRENGTHS ...**

- Improved load transfer with the jack positioned in front of the axles
- Improved strength with double walls, sides and bottom in a single length
- Long service life thanks to the continuous welds
- Large bogie clearance

Model	BTP 24	BRTP 29	BRTP 32
Length	5.60 m.	6.00 m.	6.50 m.
Width	2.20 m.	2.20 m.	2.20 m.
Height	0.85 m.	0.85 m.	1.10 m.
Axles	Bogie □ TP 150	Bogie □ TP 150	Tridem □ TP 150
Brakes	406 x 100	520 x 180	406 x 140
Volume of oil	46 L.	46 L.	65 L.
Container	Hardox		
Hydraulic tailgate	standard		
Trailer	optional	standard	standard

Construction dumpers

For more information...



BRTP29



BTP24 semi-circular container



XLTP29



BRTP32

Machinery carrier















For more information...

- 50 mm thick hardwood floor
- IPE chassis with full length cross pieces
- Split rear ramp panel
- Front wheel back with spare wheel holder
- Half-mesh bracing on the sides
- 0.25 m manual expanders
- Reinforced crossbar with transverse spring and standard towing eye
- Two hydraulic supports when descending the ramps
- Four retractable flashing beacons on the sides
- Two rear metal ramps with lift on distributor

Characteristics	Length	Platform height	Axles	Trailer	Container
PE 32	10 m	98 cm	tridem □120	rear series	235/75R17, 5 twin wheels







Flat beds









PLR26T-12m

Easycover system

ADVANTAGES

For more information...

- Extendible shoring bars front and rear
- Bolted trunnion, double row of ball bearings 36 tonnes of traction
- Platform reinforced by multiple crosspieces and gooseneck reinforcement
- Strap attachment along the platform length
- Bolted reels
- Adjustable crossbar spring
- Total width 2.55 m
- Built-in shoring bars

MAIN **STRENGTHS ...**

- Increase in length thanks to shoring bars
- Detachable and more resistant trunnion
- Easy to lash all the way round
- Practical, effortless hitching
- Large usable area
- Reinforcements under the platform every 0.50 m.
- Flat or inclined base

Characteristics	Length	Width	Axles No. of axles	Brake system	Brake axles
PLR 26T (40 km/h)*	10/12m	2.54 m	3 x □ 100 10 axles	300x160	3

* just with the 445/45 R19.5

All our flat beds are mounted on spring suspension and equipped with rear LED lighting + marker lights



Bolted trunnion



Lashing made easy



Gooseneck reinforcement on IPE



Kit 40 km/h



Extendible shoring bars (2 x 0.75 m.)



Multiple reinforcements

SP flat bed









ADVANTAGES

- 300 x 200 tube chassis
- 4 mm floor panel
- Tridem with 1 rear trailer
- Crossbar with transverse springs
- Hydraulic support
- LED lights

For more information...

Characteristics	Length	Width	Axles No. of axles	System - Brakes
SPR 25.5 (40 km/h)	10 m or 12 m	2.54 m	3 x □ 130 - 10 axles	406 x 140



Panien by LA CAMPAGNE

Spreaders

A full range to meet your needs

Vertical spreader, with spreading table or for powdered products,
over 80 years of expertise in the field of spreading!



ISOBUS



PW218



KW115



UW221

Combining expertise with cutting-edge technology to provide you with the very best!

Some of the reasons why La Campagne acquired Panien:

First and foremost, Panien's expertise and undisputed reputation in precision spreading for over 80 years, as well as the proximity of its site to Inchy en Artois, which enabled the Hermies site to be merged and expanded.

For more information...



CW115





VW213

Tyres





Nokian Nokian CK | Nokian VF Float King | Nokian CT




Longmarch Longmarch LM168 | Longmarch LM539F







BKT BKT Ridemax FL693 | BKT V-Flexa | BKT FL630 super | BKT FL695 | BKT FL699




Maxam Agilxtra MS962R | Flotxtra MS961R




Ceat Floatmax FT | Floatmax RT




Alliance A380 | A590




Vredestein Endurio Trailer | Flotation Trac




Michelin Trail Xbib VF | XS 24x20,5

The pleasure of a job well done!

All 'La Campagne' equipment is subject to stringent checks prior to delivery to ensure that the delivered product is of the highest quality.

Your feedback, comments and suggestions are very valuable to us and enable us to move forward together and improve.

engagement QUALITÉ garantie

The clear and very strong interest in our range over the past few years means that the 'La Campagne' brand is now available to everyone.

One team, one After-Sales Service



The shop is open all year round, even throughout your work in the summer!

After-sales shop
Tel.: +33 (0)3 21 90 40 79

email: magasin@bennelacampagne.com

A large sales network where you can find our brands near you!

Contact us to find out who our dealers are.

Ets Antoine CORNE S.A.S.
303 Rue de Buire • 62870 Campagne-lès-Hesdin
Tel.: +33 (0)3 21 90 31 11
contact@bennelacampagne.com

Ets Panien - La Campagne
35 rue de Demicourt • 62147 Hermies
Tel.: +33 (0)3 21 24 55 55
contact@bennelacampagne.com

Design www.nord-image.com - Abbeille

Follow us:
Bennes La Campagne
Panien

Fabriqué dans les Hauts de France

www.bennelacampagne.com